

GVL 8301-K V2



Performance features

- » Compact ventilation control panel
- » For controlling 24 V DC window drives
- » Up to 1 A total drive current
- » 1 ventilation group
- » Input for external controller, e.g. timer
- » Ventilation safety function (storage operation OPEN / CLOSED)
- » Ability to connect drives with TMS function
- » Optional connection to rain detectors or wind / rain sensors without an additional module
- » Surface-mounted plastic housing

Accessories


Operation elements



Weather sensors



Example of application

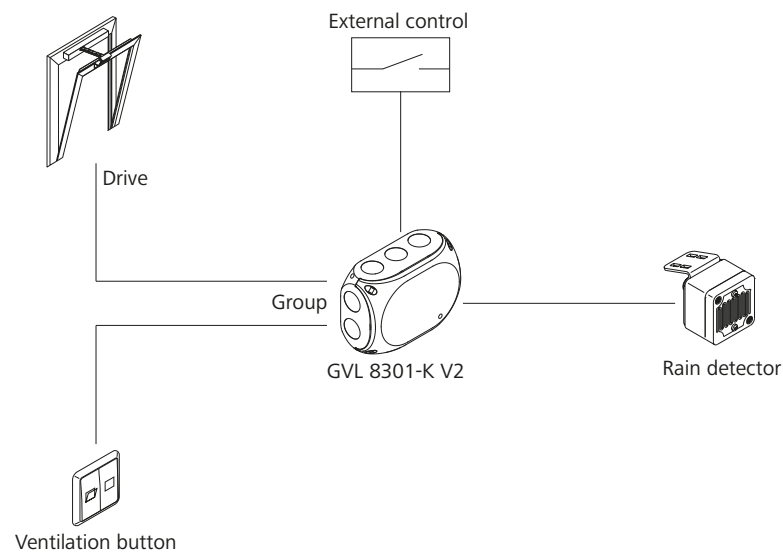

Technical data

	GVL 8301-K V2
Supply	230 V AC / 50 Hz / 30 VA
Stand-by power	4.3 W
Output	24 V DC / 1 A
Mode of operation	Short-time duty 20 % duty cycle
Type of protection	IP 66
Temperature range	-5 °C ... +40 °C
Housing	Polypropylene
Colour	Light grey (~ RAL 7035)
W x H x D	180 x 130 x 77 mm
Weight	0.85 kg

Design

Type	Art. No.
GVL 8301-K V2	30.242.00